

# LED PANEL LIGHT



MODEL: PL1X4UCCTW

SKU: 500814UCCTW


1X4 LED PANEL LIGHT

ELAKEVIEW ENTERPRISE LTD.

## PRODUCT DESCRIPTION

The Elakeviw LED Panel light provides high lumen efficacy and energy savings to projects in low ceiling applications.

This panel light is an excellent energy efficient replacement for fluorescent fixture.

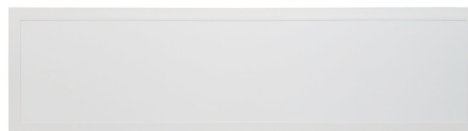

## HIGHLIGHTS

- DLC Listed
- AC120-347V Wide Input
- Color Temperature Selectable:  
3500K/4000K/5000K
- Wattage Selectable:  
30W/35W/40W
- Efficacy: 111.37lm/W
- CRI>80
- 1-10V Dimmable
- Damp Location Rated
- L70-50,000 hours
- Ultra-thin, Seamless Aluminum Frame
- PMMA Non-Yellowing Frosted Lens
- 7 Years Warranty. Extended Warranty Available



## APPLICATIONS

Designed for use in offices, schools, health care spaces, retail stores and more.

### ORDERING INFORMATION

ORDER SKU	DLC MODEL #	INPUT VOLTAGE	POWER (W)	EFFICACY (LMW)	DELIVERED LUMENS	CCT(K)	FINISH	SIZE
500816UCCTW	PL2X4UCCTW	AC120-347V	30/40/50W	111.37LMW	5235LM	3500/4000/5000K	WHITE	2x4
500816UCCTW2	PL2X4UCCTW2	AC120-347V	30/40/50W	111.37LMW	5235LM	3500/4000/5000K	WHITE	2x4
500812UCCTW	PL2X2UCCTW	AC120-347V	30/35/40W	111.37LMW	4400LM	3500/4000/5000K	WHITE	2X2
500812UCCTW2	PL2X2UCCTW2	AC120-347V	30/35/40W	111.37LMW	4400LM	3500/4000/5000K	WHITE	2X2
500814UCCTW	PL1X4UCCTW	AC120-347V	30/35/40W	111.37LMW	4400LM	3500/4000/5000K	WHITE	1x4
500814UCCTW2	PL1X4UCCTW2	AC120-347V	30/35/40W	111.37LMW	4400LM	3500/4000/5000K	WHITE	1x4
500829-35K	KK-PS-22WW-40-LLCZ	AC120-277V	40W	113LM	4276LM	3500K	WHITE	2X2
500830-35K	KK-PS-24NW-50-LFSZ	AC120-277V	50W	112LM	5883LM	3500K	WHITE	2x4
500831-35K-BL	PL1x430WUNV35K	AC120-277V	30W	128LM	3850LM	3500K	WHITE	1x4
500831-35K-BL	PL1x430WUNV35K	AC120-277V	30W	128LM	3850LM	3500K	WHITE	1x4

REV 1

## 1X4 LED PANEL LIGHT

ELAKEVIEW ENTERPRISE LTD.

## PRODUCT FEATURE

- Lightweight and Slim Design
- AC120-347V Wide Input
- Color Temperature Selectable: 3500K/4000K/5000K
- Wattage Selectable: 30W/35W/40W
- Efficacy: 111.37lm/W
- CRI>80
- 1-10V Dimmable, Flicker-Free Driver
- PMMA Non-Yellowing Frosted Lens
- Unique Heat Dissipation Design
- Seismic Clips Included
- High Shock and Vibration Resistance
- Embed/Suspension/Ceiling-mount
- L70-50,000 hours


• 7 Years Warranty. Extended Warranty Available.

## PRODUCT SPECIFICATIONS


LED TYPE	WATTS	SYSTEM EFFICACY	LUMENS	COLOR TEMP	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ	POWER EFFICIENCY	POWER FACTOR	THD	OPERATING TEMP
SEOUL	30W 35W 40W	111.37 LM/W	4400LM @40W	3500K 4000K 5000K	120°	83.8	120-347V	50/60HZ	86%-87%	>.95	<13.4%	-20 to 40C

## DIMENSIONS

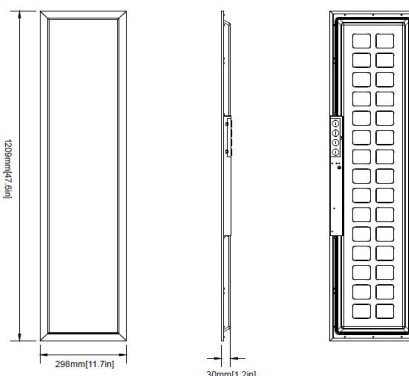

Length: 11.7" 29.8CM  
Width: 47.6" 120.9CM  
Depth: 1.2" 3.0CM



## MOUNTING OPTIONS

			
SUSPENSION KIT		SURFACE MOUNT KIT	
SKU	HangingKits	SKU	900018-1X4

## OPTIONAL ACCESSORIES

			
347V QUICK CONNECTOR		OCCUPANCY SENSOR	
SKU	STN 68869	SKU	WSPERMUNV-D

REV 1

# LED PANEL LIGHT




## 1X4 LED PANEL LIGHT

ELAKEVIEW ENTERPRISE LTD.


### PHOTOMETRIC INFORMATION

Fixture Output: Rated Lumens/Lamp: 4400.0  
 Zonal lumens in the 0-60° zone (%) 78.0  
 Input Wattage: 40  
 Beam Angle (°) 113.9  
 Center Beam Candle Power (cd): 1792


### ISOFOOTCANDLE PLOT

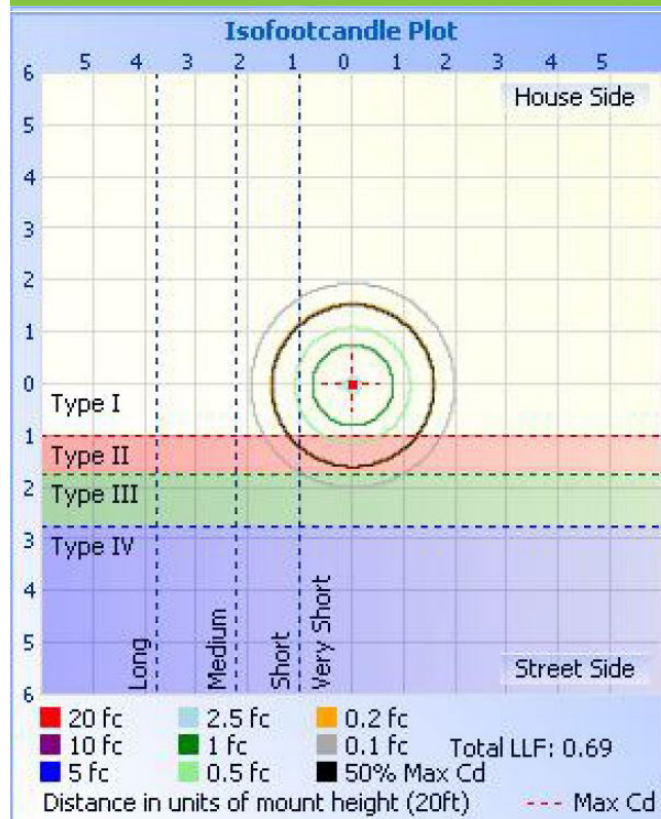


### ILLUMINANCE AT A DISTANCE

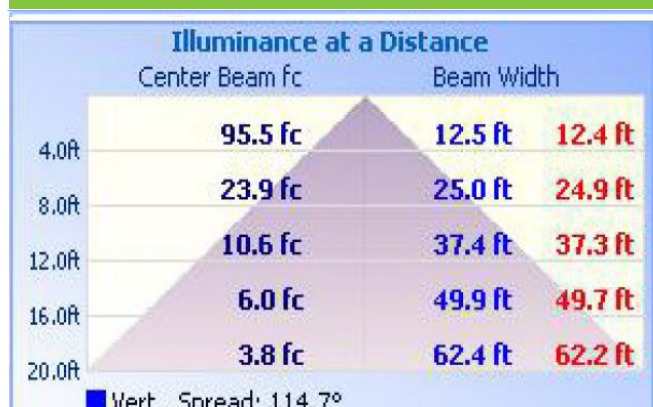

### POLAR CANDELA DISTRIBUTION

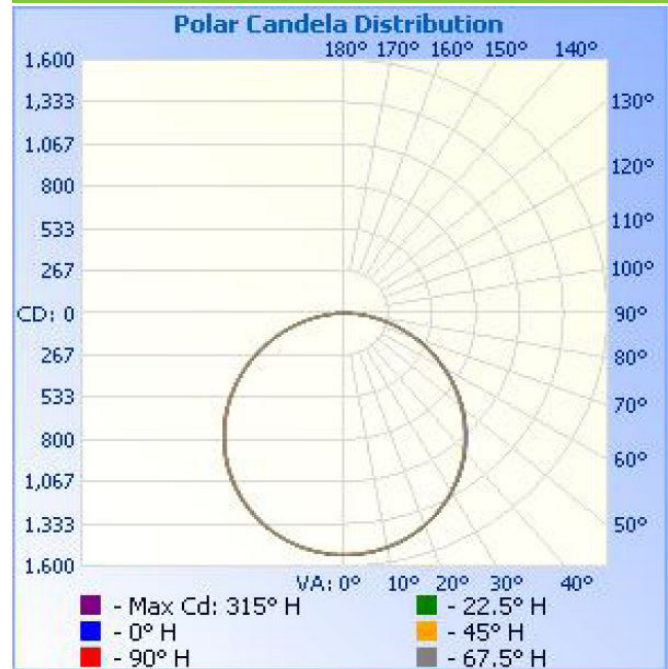

### ISOCANDELA PLOT

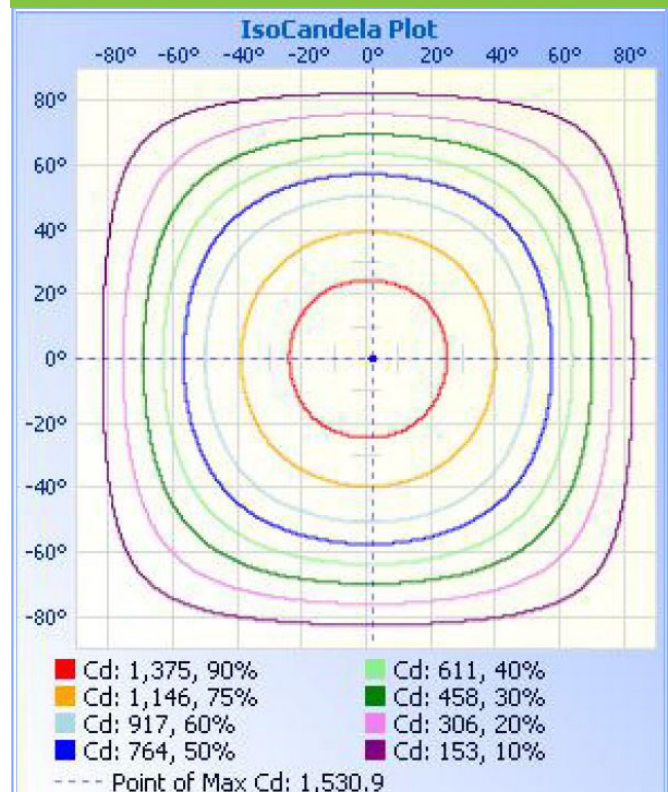

REV 1